TEFCOLD®
COOL PRODUCTS WORLDWIDE

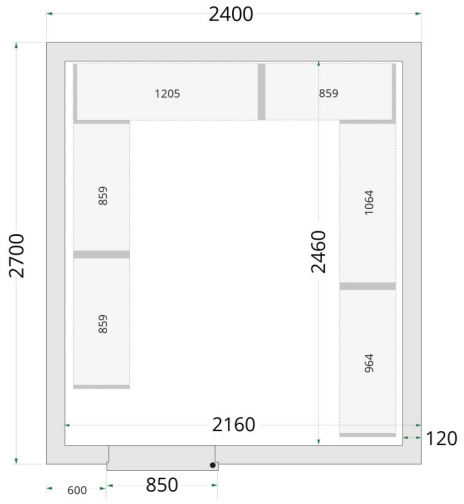

Measures and Content		
Gross / Net Weight	kg	685 / 665
Internal Volume	m³	10.41
Wall Thickness	mm	120
Design and Material		
Exterior Finish		White
Interior Finish		White
Max Load on Floor	kg/m²	2000
No. of Doors		1
Door Number & Type		1 hinged solid door
Door Reversible		Yes
Lock		Yes
Cooling and Functions		
		51055
Power and Consumption		
		51055
Dimensions		
External Dimension (WxDxH)	mm	2400 x 2700 x 2200
Internal Dimension (WxDxH)	mm	2160 x 2460 x 1960
Packed Dimension (WxDxH)	mm	2470 x 1860 x 1460
40ft Container Load	pcs	4

Cold Room 240x270x220 WD

Product Features
- 850 mm wide door
- Only panels - without cooling unit
- Interlocking connection system
- 120 mm panel insulation
- Easy access to products
- Easy assembly
- Door position is fixed
- Anti-slip floor in SS304 stainless steel
- Shelves available as accessory
- Ramp available as accessory for easy access

TEFCOLDs cold room panels are quick to assemble with an easy interlocking system. This model has a 850 mm wide door, allowing easy access with a euro pallet.

Our range of cold room panels are equipped with an effective polyurethane insulation. Combine the panels with one of our energy efficient monoblock refrigeration units for high cooling performance and low energy consumption.

In terms of accessories, you have the option of a ramp to provide easy access with lightweight trolleys and bakery racks (the room is not suitable for pallet jacks/pallet trucks). We also offer shelf rack system kits for optimizing storage space. We also offer cold room panels with a wide door (see WD models). The panels are not suitable for outdoor use.

Strong handle

Lock system