


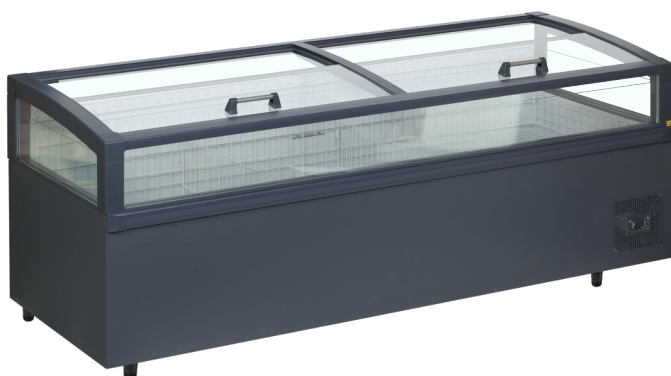

VIEW 250 CF VS

Supermarket Cooler / Freezer

Product Features

- Great product visibility
- Easily switchable between cooler and freezer
- Energy saving variable speed compressor
- Front to back sliding glass lids for easy access
- Triple glazed insulated glass on all 3 sides
- LED interior light
- Digital controller and temperature display
- Adjustable false base

Supermarket cooler/freezer with excellent product visibility

This supermarket cooler/freezer has a contemporary design with glass walls on the upper part of three sides as well as two glass lids for a fantastic product visibility. The sliding lids open front to back, allowing access to both sides of the unit at the same time. The cabinet furthermore offers great product presentation with LED lighting and an adjustable false base that makes it possible to always have the freezer/cooler look stocked.

It is a versatile unit with the option of both cooler or freezer in one unit. It is easy to switch the cabinet between cooling and freezing, simply set the required temperature on the display controller. This is very handy, especially for stores that need to adapt their product selection according to different seasons. The cabinet has a variable speed compressor as well as triple glazed glass on the sides and front for enhanced energy efficiency.

Measures and Content

Insulation Density	kg/m ³	42
Total Display Area	m ²	1.93
Temperature Range	°C	-22 to +10
Climate Class		3
Gross / Net Weight	kg	220 / 175
Gross / Net Volume	l	1320 / 860

Design and Material

Tempered glass		Yes
Divider System		Yes
Number of dividers	pcs	2
Feet / Legs		4 adjustable feet
Exterior Finish		Anthracite RAL 7016
Interior Finish		White
Interior Light		LED
Lock		No

Cooling and Functions

Type of Controller	Electronic
Type of Cooling	Static
Type of Defrost	Automatic, hot gas
Refrigerant	R290
Refrigerant Charge	g127
Thermometer	Yes

Power and Consumption


Energy Class		D
Energy Consumption	kWh/24h	10.4
Annual Energy Cons.	kWh/year	3796
EEL	%	39.6
Input Power	W	520
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	54

Dimensions

Internal Dimension (WxDxH)	mm	2345 x 820 x 880
External Dimension (WxDxH)	mm	2500 x 980 x 970
Packed Dimension (WxDxH)	mm	2606 x 1066 x 1028 mm
40ft Container Load	pcs	16



Strong handle



Adjustable false base