Model	**Fast 60MDE**
Code Production	917292

Interface :





Overall Dimension (Width-Depth-Height) *open	mm	575x605(1005*)x820
Packaging Dimension (WxDxH)	mm	690x670x980
Gross weight	Kg	62
Net weight	Kg	56
Volume	mc	0,45
Rack size	mm	500x500
Max door /hood opening	mm	365
Max glasses/plate Height	mm	325
General construction		single skin
Door/hood Construction		double skin
Tank construction		welded
Tank volume	liter	20
Tank heating element	W	2.100
Tank surface strainers		composite
Wash pump type		double flow
Wash pump power	W	470
Wash temperature	°C	60 (55-->65)
Boiler type		pressurized
Boiler volume	liter	6
Back-flow system		valve
Boiler heating element	W	3.000
Rinse booster pump		no
Rinse booster pump power	W	-
Rinse temperature	°C	80 (67-->88)
Rinse water consumption	Liter /rack	2,1
Optimal external water pressure	bar	2 - 4
Drain system		deep drain
Drain filter		double filtering
Drain pump		standard built in
Rinse aid dispenser		YES
Detergent dispenser		YES
Wash cycle	sec	60 - 90 - 180
Special cycle	programs	n°1
Self cleaning cycle		YES
Electric Power	W	3.500
Electric Connection	V - ph - Hz	230V 1N 50Hz
Fuse	A	16
Water softner		NO
Plates racks	N°1	780131
Flat Rack	N°1	780132
Cutterly Rack	N°1	780139
Electric cable		YES
Drain hose		YES
Fill hose		YES

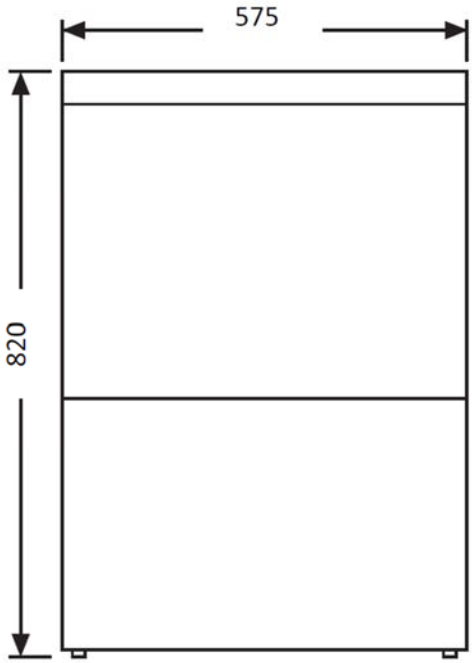
575
820

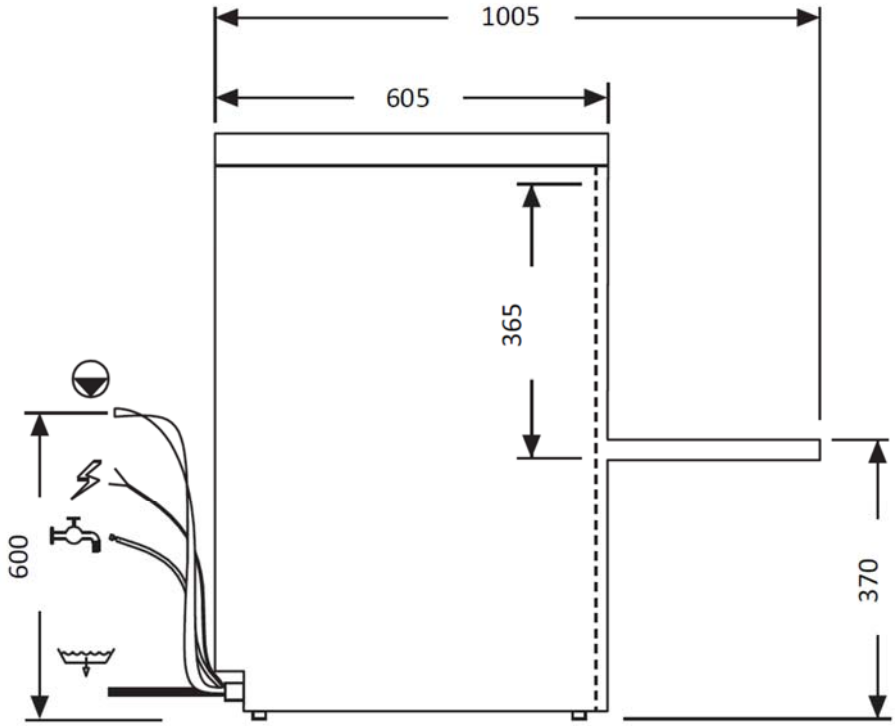
1005
605
365
600
370