

BA21S

Back Bar Cooler

Product Features

- EU Energy Class A
- Approx. 59% more energy efficient than previous BA-range
- Double glazed tempered glass
- Reversible glass door
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- Adjustable shelves
- LED interior light
- Lock

High-quality sliding door backbar with low energy consu

The BA21S Backbar Cooler is a pinnacle of efficiency for your food and hospitality business. With an EU Energy Class A rating, it surpasses its predecessors by approximately 59% in energy efficiency, ensuring cost savings without compromising performance. Equipped with double-glazed tempered glass and self-closing sliding doors, this cooler optimises insulation and reduces energy loss while providing easy access. The ventilated cooling system guarantees swift pull-downs and consistent temperatures, preserving the freshness of your inventory. The adjustable shelves, LED interior lighting, and a secure lock offer convenience, visibility, and security in one versatile unit. With energy-saving features, precision temperature control, and a secure design, this cooler is tailored to meet the demands of busy food and hospitality establishments.

Measures and Content

Total Display Area	m ²	0.54
Temperature Range	°C	+2 to +10
Climate Class		4
Net Volume	l	188
Gross Volume	l	196
Gross / Net Volume	l	196 / 188
Gross / Net Weight	kg	70 / 64

Design and Material

No. of Doors		2
Door Number & Type		2 sliding glass doors
No. of Shelves	pcs	4
Shelves Number & Type		4 wire shelves chrome
Shelf Color		Chrome
Shelf Dimensions		395x328 mm
Tempered glass		Yes
Feet / Legs		4 adjustable feet
Interior Light		LED
Lock		Yes
Exterior Finish		Black
Interior Finish		Stucco aluminium

Cooling and Functions


Type of Controller		Electronic
Type of Cooling		Ventilated
Type of Defrost		Automatic
Refrigerant Charge	g	70
Refrigerant		R600a
Thermometer		Yes

Power and Consumption

Energy Class		A
Max Ambient		+30°C, 55% RH
Annual Energy Consumption	kWh/year	416
Energy Consumption	kWh/24h	1.14
EEL	%	9
Power		13 Amp
Input Power	W	115
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	44

Dimensions

External Dimension (WxDxH)	mm	900 x 515 x 900
Internal Dimension (WxDxH)	mm	810 x 418 x 734
Packed Dimension (WxDxH)	mm	985 x 575 x 970
40ft Container Load	pcs	96

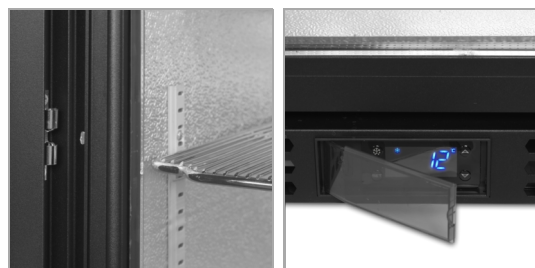

Door holder for loading
of the cabinet

Electronic thermostat