


COOL PRODUCTS WORLDWIDE

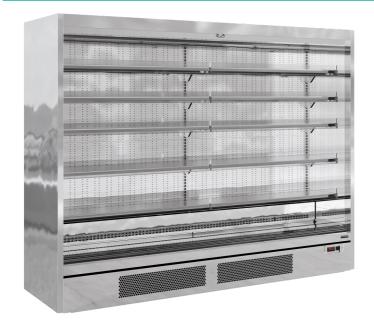

Galaxy+ GP26 SS

Multideck

Product Features

- · Fully automatic, fan assisted cooling
- Horizontal LED lighting
- Solid 40 mm endwalls with mirrored interior
- Soft closing nightblind
- 5 Adjustable shelves, max weight 160kg/sq metre
- Shelves can be flat or angled to 7° or 14°
- EPOS Ticket strips & shelf risers
- Suitable for fresh meat
- Can be multiplexed with kit (POA)

Stainless Steel Multideck

The TEFCOLD Galaxy+ range, finished in mirror stainless steel: our latest innovation in plug-in multidecks. We've combined an expanded display area and optimised cabinet efficiency. The ultralow front and slim top canopy provide an extra 100mm of internal height, accommodating up to 5 shelves (plus base) as standard, all while maintaining an overall height of just 2040mm. With a depth of only 750mm, the unit fits through standard doors for easy installation, yet has 400mm deep shelves for maximum stock capacity. Each unit comes with heavy-duty adjustable shelves that can be tilted if needed, as well as EPOS ticket strips and shelf risers as standard. Optional extras include glass end-walls and multiplexing kits.

| Measures and Content | | |
|---|----------------------------------|--|
| Total Display Area | m² | 3.83 |
| Temperature Range | °C | -1 to +5 |
| Climate Class | | 3 |
| Gross / Net Weight | kg | 460 / 430 |
| Gross / Net Volume | 1 | 2887 / 1258 |
| Design and Material | | |
| Shelves Number & Type | | 5 adjustable |
| Shelf Color | | Stainless steel |
| Shelf Dimensions | | 1250x400mm |
| Max load on Shelves | kg/m² | 160 |
| Feet / Legs | - | 6 adjustable feet |
| Exterior Finish | | Mirror Stainless Steel |
| Interior Finish | | Mirror Stainless Steel |
| Interior Light | | LED |
| Lock | | No |
| Cooling and Functions | | |
| Type of Controller | | Electronic |
| Type of Cooling | | Ventilated |
| Type of Defrost | | Automatic |
| | | |
| Refrigerant Charge | - | R290 |
| Refrigerant Charge | g | 2 x 150 |
| Thermometer | | Yes |
| | | |
| Power and Consumption | | |
| Power and Consumption Energy Class | | E |
| | kWh/24h | E 29.57 |
| Energy Class | kWh/24h kWh/year | |
| Energy Class Energy Consumption | | 29.57 |
| Energy Class Energy Consumption Annual Energy Consumption | | 29.57 10793 |
| Energy Class Energy Consumption Annual Energy Consumption Power | | 29.57 10793 16 Amp |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient | kWh/year | 29.57 10793 16 Amp 25°C at 60% RH |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power | kWh/year | 29.57 10793 16 Amp 25°C at 60% RH 868 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency | kWh/year W V/Hz | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency Noise Level | kWh/year W V/Hz | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency Noise Level Dimensions | kWh/year W V/Hz dB(A) | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 55 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency Noise Level Dimensions Internal Dimension (WxDxH) | kWh/year W V/Hz dB(A) | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 55 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency Noise Level Dimensions Internal Dimension (WxDxH) External Dimension (WxDxH) | kWh/year W V/Hz dB(A) mm mm | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 55 2500 x 544 x 1562 2580 x 740 x 2040 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency Noise Level Dimensions Internal Dimension (WxDxH) External Dimension (WxDxH) Packed Dimension (WxDxH) | kWh/year W V/Hz dB(A) mm mm mm | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 55 2500 x 544 x 1562 2580 x 740 x 2040 2650 x 770 x 2320 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency Noise Level Dimensions Internal Dimension (WxDxH) External Dimension (WxDxH) Packed Dimension (WxDxH) | kWh/year W V/Hz dB(A) mm mm mm | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 55 2500 x 544 x 1562 2580 x 740 x 2040 2650 x 770 x 2320 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency Noise Level Dimensions Internal Dimension (WxDxH) External Dimension (WxDxH) Packed Dimension (WxDxH) | kWh/year W V/Hz dB(A) mm mm mm | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 55 2500 x 544 x 1562 2580 x 740 x 2040 2650 x 770 x 2320 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency Noise Level Dimensions Internal Dimension (WxDxH) External Dimension (WxDxH) Packed Dimension (WxDxH) | kWh/year W V/Hz dB(A) mm mm mm | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 55 2500 x 544 x 1562 2580 x 740 x 2040 2650 x 770 x 2320 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency Noise Level Dimensions Internal Dimension (WxDxH) External Dimension (WxDxH) Packed Dimension (WxDxH) | kWh/year W V/Hz dB(A) mm mm mm | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 55 2500 x 544 x 1562 2580 x 740 x 2040 2650 x 770 x 2320 |
| Energy Class Energy Consumption Annual Energy Consumption Power Max Ambient Input Power Voltage / Frequency Noise Level Dimensions Internal Dimension (WxDxH) External Dimension (WxDxH) Packed Dimension (WxDxH) | kWh/year W V/Hz dB(A) mm mm mm | 29.57 10793 16 Amp 25°C at 60% RH 868 220-240/50 55 2500 x 544 x 1562 2580 x 740 x 2040 2650 x 770 x 2320 |