


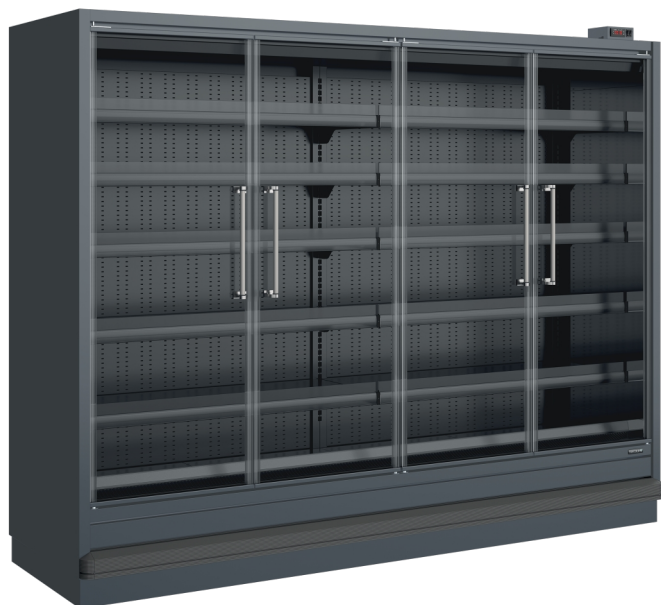

Trojan T26 FGD A

Remote Multideck

Product Features

- Colour is anthracite RAL7016
- Requires remote refrigeration system (not supplied)
- Frameless glass doors for great product visibility
- Adjustable shelves, max weight 160kg/sq metre
- Shelves can be flat or angled to 7° or 14°
- Solid 40 mm endwalls with mirrored interior
- Horizontal LED lighting
- Digital controller and temperature display
- EPOS Ticket strips & shelf risers
- Extraction rate 650w/per metre
- Can be multiplexed with kit (POA)
- Also available in an extended height version

Remote Multideck

This popular remote multideck range allows you to maximise your display space whilst also reducing the impact of noise and heat. This unit is available in 4 sizes. Available for multiplexing, with a kit this allows you to create a larger display size. This unit offers a large display area with high-capacity vertical merchandising, great for product presentation. Ideal for a large range of chilled products with even temperature distribution across all shelf levels. Plus the LED illumination enhances the presentation of produce, whilst the energy-efficient operation and modular construction allows for seamless continuous line-ups. Please note this requires an additional remote refrigeration system. 2 year parts warranty only.

Measures and Content

Gross / Net Weight	kg	511 / 480
Gross / Net Volume	l	/
Total Display Area	m²	3.67
Temperature Range	°C	-1 to +5
Climate Class		3

Design and Material

Exterior Finish	Anthracite RAL7016	
Interior Finish	Anthracite RAL7016	
No. of Doors	4	
Door Number & Type	4 hinged glass door	
Door Reversible	No	
No. of Shelves	pcs	5
Shelves Number & Type	5 adjustable	
Shelf Color	Anthracite	
Shelf Dimensions	5 x 450 mm	
Tempered glass	Yes	

Cooling and Functions

Type of Defrost	Automatic	
Refrigerant	R449a	
Refrigerant Charge	g	REMOTE

Power and Consumption

Energy Class		C
Max Ambient		+25°C, 60% RH
Energy Consumption	kWh/24h	17.02
Annual Energy Consumption	kWh/year	6212
EEL	%	34.8
Voltage / Frequency	V/Hz	220-240/50

Dimensions

External Dimension (WxDxH)	mm	2584 x 784 x 2076
Internal Dimension (WxDxH)	mm	2500 x 450 x 1578
Packed Dimension (WxDxH)	mm	2750 x 850 x 2390
40ft Container Load	pcs	8



Digital controller



Strong handles