



## CRU7610P for CRPF1530

Monoblock Cooler Unit (7,6-10m<sup>3</sup>)

### Product Features

- Monoblock cooling unit
- Automatic condensate evaporation
- Ambient temperature up to +43 °C and 65% humidity
- Digital controller and temperature display
- Stainless steel finish

Monoblock cooler unit for temperature -2 to +8 °C

Monoblock cooler unit for cold rooms with a volume of 7,6-10m<sup>3</sup>.  
Only suitable for models CR150x300x220 and 150x300x212 NF.

### Measures and Content

Capacity Cooling Coldroom Units	m <sup>3</sup>	7,6 - 10
Insulation Density	kg/m <sup>3</sup>	42
Temperature Range	°C	0 to +8
Climate Class		5
Gross / Net Weight	kg	90 / 80
Gross / Net Volume	l	

### Design and Material

Door No & Type	
Exterior Finish	Stainless steel
Interior Light	LED

### Cooling and Functions


Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic, hot gas	
Refrigerant	R290	
Refrigerant Charge	g	150
Thermometer	Yes	

### Power and Consumption

Energy Consumption	kWh/24h	21.12
Annual Energy Cons.	kWh/year	7709
Input Power	W	905
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	60

### Dimensions

Internal Dimension (WxDxH)	mm	
External Dimension (WxDxH)	mm	600 x 910 x 880
Packed Dimension (WxDxH)	mm	700 x 1110 x 1170
40ft Container Load	pcs	60

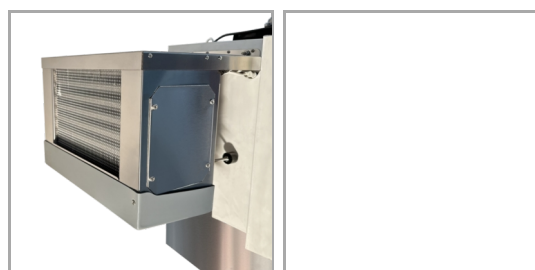

Monoblock rear –  
attached to panel