


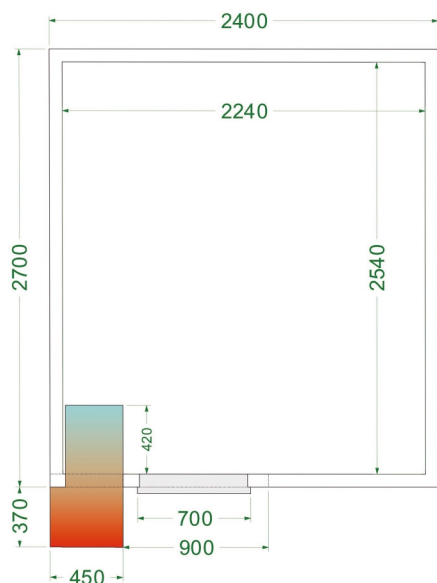

## CRPF2427

### Coldroom (Cooling)

#### Product Features

- Plug-In - ready after assembly
- Many customisation possibilities
- Easy access to products
- Easy assembly
- Anti-slip floor in SS304 stainless steel
- 80 mm panel insulation
- Shelves available as accessory
- Ramp available as accessory for easy access

#### Measures and Content

|                    |       |           |
|--------------------|-------|-----------|
| Internal Volume    | m³    | 11.6      |
| Wall Thickness     | mm    | 80        |
| Insulation Density | kg/m³ | 42        |
| Temperature Range  | °C    | 0 to +8   |
| Climate Class      |       | 5         |
| Gross / Net Weight | kg    | 666 / 636 |
| Gross / Net Volume | l     |           |

#### Design and Material

|                    |                                  |      |
|--------------------|----------------------------------|------|
| Door Number & Type | 1 hinged solid door W:700 H:1845 |      |
| Max Load on Floor  | kg/m²                            | 1500 |
| Exterior Finish    | White                            |      |
| Interior Finish    | White                            |      |
| Interior Light     | LED                              |      |
| Lock               | Yes                              |      |

#### Cooling and Functions

|                    |                    |     |
|--------------------|--------------------|-----|
| Type of Controller | Electronic         |     |
| Type of Cooling    | Ventilated         |     |
| Type of Defrost    | Automatic, hot gas |     |
| Refrigerant        | R290               |     |
| Refrigerant Charge | g                  | 170 |
| Thermometer        | Yes                |     |

#### Power and Consumption

|                           |          |            |
|---------------------------|----------|------------|
| Energy Consumption        | kWh/24h  | 23.4       |
| Annual Energy Consumption | kWh/year | 8541       |
| Input Power               | W        | 910        |
| Voltage / Frequency       | V/Hz     | 220-240/50 |
| Noise Level               | dB(A)    | 60         |

#### Dimensions

|                            |     |                    |
|----------------------------|-----|--------------------|
| Internal Dimension (WxDxH) | mm  | 2240 x 2540 x 2040 |
| External Dimension (WxDxH) | mm  | 2400 x 2700 x 2200 |
| Packed Dimension (WxDxH)   | mm  | 2500 x 1900 x 2400 |
| 40ft Container Load        | pcs | 8                  |



Strong handle



Shelf as accessory