


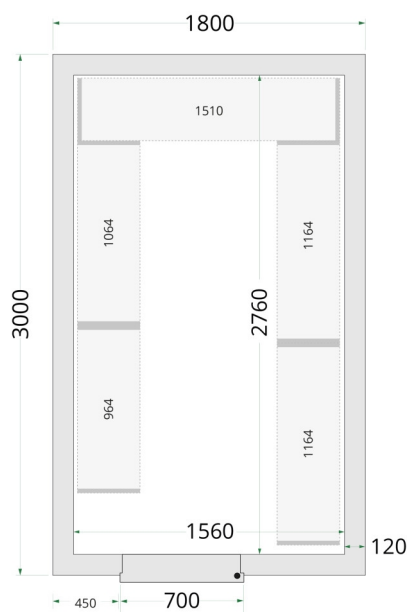

## Cold Room 180x300x220

### Cold Room Panels

#### Product Features

- Only panels - without cooling unit
- Interlocking connection system
- 120 mm panel insulation
- Many customisation possibilities
- Easy access to products
- Easy assembly
- Anti-slip floor in SS304 stainless steel
- Shelves available as accessory
- Ramp available as accessory for easy access

TEFCOLDs cold room panels are quick to assemble with an easy interlocking system. The interchangeable modular panels allow different positioning of the door, so you can build the room to fit your space.

Our range of cold room panels are equipped with an effective polyurethane insulation. Combine the panels with one of our energy efficient monoblock refrigeration units for high cooling performance and low energy consumption.

In terms of accessories, you have the option of a ramp to provide easy access with lightweight trolleys and bakery racks (the room is not suitable for pallet jacks/pallet trucks). We also offer shelf rack system kits for optimizing storage space. We also offer cold room panels with a wide door (see WD models). The panels are not suitable for outdoor use.

#### Measures and Content

|                    |                |           |
|--------------------|----------------|-----------|
| Gross / Net Weight | kg             | 600 / 580 |
| Internal Volume    | m <sup>3</sup> | 8.44      |
| Wall Thickness     | mm             | 120       |

#### Design and Material

|                    |                     |       |
|--------------------|---------------------|-------|
| Exterior Finish    |                     | White |
| Interior Finish    |                     | White |
| Max Load on Floor  | kg/m²               | 2000  |
| No. of Doors       |                     | 1     |
| Door Number & Type | 1 hinged solid door |       |
| Door Reversible    |                     | Yes   |
| Lock               |                     | Yes   |

#### Cooling and Functions

|  |       |
|--|-------|
|  | 44151 |
|--|-------|

#### Power and Consumption

|  |       |
|--|-------|
|  | 44151 |
|--|-------|

#### Dimensions

|                            |     |                    |
|----------------------------|-----|--------------------|
| External Dimension (WxDxH) | mm  | 1800 x 3000 x 2200 |
| Internal Dimension (WxDxH) | mm  | 1560 x 2760 x 1960 |
| Packed Dimension (WxDxH)   | mm  | 2200 x 1900 x 1200 |
| 40ft Container Load        | pcs | 6                  |



Strong handle



Lock system