


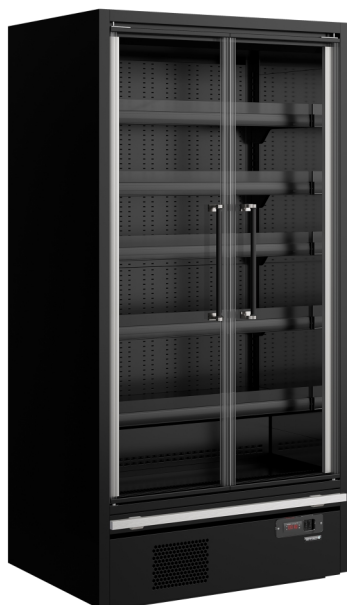

Galaxy+ GP10FGD Black

Multideck With Doors

Product Features

- EU Energy Class B
- Can be multiplexed - Create uninterrupted continuous line
- Frameless glass doors for great product visibility
- Adjustable shelves (can be tilted)
- Heavy duty shelving with strengthening bar
- Ticket strip and acrylic front riser as standard
- Self-closing doors
- Solid 40 mm endwalls with mirrored interior
- Internal vertical and horizontal LED light
- Stainless steel bumper bars
- Can be multiplexed with kit (POA)

Full Glass Door Multideck

Introducing the TEFCOLD Galaxy+ FGD (Full Glass Door) range: our latest innovation in plug-in multidecks. We've combined an expanded display area and optimized cabinet efficiency with frameless, full-vision glass doors, offering enhanced product visibility that captures customers' attention. The ultra-low front and slim top canopy provide an extra 100mm of internal height, accommodating up to 5 shelves (plus base) as standard, all while maintaining an overall height of just 2005mm. With a depth of only 750mm, the unit fits through standard doors for easy installation, yet has 400mm deep shelves for maximum stock capacity. Thanks to the carefully designed refrigeration system and optimal airflow throughout the cabinets, all sizes in this range are rated A or B for energy efficiency. Each unit comes with heavy-duty adjustable shelves that can be tilted if needed, as well as EPOS ticket strips and shelf risers as standard. Optional extras include glass end-walls and multiplexing kits.

Measures and Content

Total Display Area	m²	1.44
Temperature Range	°C	-1 to +5
Climate Class		3
Gross / Net Weight	kg	277 / 264
Gross / Net Volume	l	1083 / 472

Design and Material

Door Number & Type	2 hinged glass doors	
Tempered glass		Yes
Door Reversible		No
Shelves Number & Type	5 adjustable	
Shelf Color		Black
Shelf Dimensions	938x400mm	
Max load on Shelves	kg/m²	160
Feet / Legs	4 adjustable feet	
Exterior Finish	Black RAL9005	
Interior Finish	Black (RAL9005)	
Interior Light		LED
Lock		No

Cooling and Functions

Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic	
Refrigerant	R290	
Refrigerant Charge	g	110
Thermometer		Yes

Power and Consumption

Energy Class	B	
Max Ambient	25°C at 60% RH	
Energy Consumption	kWh/24h	3.25
Annual Energy Consumption	kWh/year	1186
Power	13 Amp	
Input Power	W	580
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	55

Dimensions

Internal Dimension (WxDxH)	mm	938 x 544 x 1562
External Dimension (WxDxH)	mm	1018 x 740 x 2040
Packed Dimension (WxDxH)	mm	1100 x 770 x 2320
40ft Container Load	pcs	30



Full height doors



Frameless glass doors