

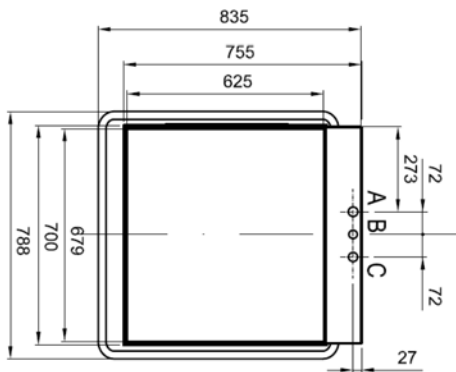


	Model	Mistral 94XD	
	Code Production	MS940XCDD	
Interface :			
			
			
	Overall Dimension (Width-Depth-Height) *open	mm	788 - 835 - 1565(*2080)
	Packaging Dimension (WxDxH)	mm	870x830x1540
	Gross weight	Kg	130
	Net weight	Kg	120
	Volume	mc	1,10
	Rack size	mm	500x600
	Max door /hood opening	mm	465
	Max glasses/plate Height	mm	450/450
	General construction		double skin
	Door/hood Construction		double skin
	Tank construction		deep drawn
	Tank volume	liter	30
	Tank heating element	W	3.000
	Tank surface strainers		Yes-composite
	Wash pump type		double flow
	Wash pump power	W	1.500
	Wash temperature	°C	60 (45-->65)
	Boiler type		pressurized
	Boiler volume	liter	6
	Back-flow system		valve
	Boiler heating element	W	8.000
	Rinse booster pump		no
	Rinse booster pump power	W	-
	Rinse temperature	°C	80 (67-->88)
	Rinse water consumption	Liter /rack	2,3
	Optimal external water pressure	bar	2 - 4
	Drain system		overflow
	Drain filter		double filter
	Drain pump		optional
	Rinse aid dispenser	peristaltic	YES
	Detergent dispenser	peristaltic	YES
	Water softner (continuous type)		NO
	Wash cycle	sec	60 - 90 - 180
	Special cycle	programs	n°4
	Self cleaning cycle		YES
	Electric Power	W	12.500
	Electric Connection	V - ph - Hz	400V 3N 50Hz
	Fuse	A	20
	Plates racks	n° 1	70180
	Flat Rack	n° 1	70181
	Cutterly Rack	n° 1	780081
	Electric cable	n° 1	YES
	Drain hose	n° 1	YES
	Fill hose	n° 1	YES

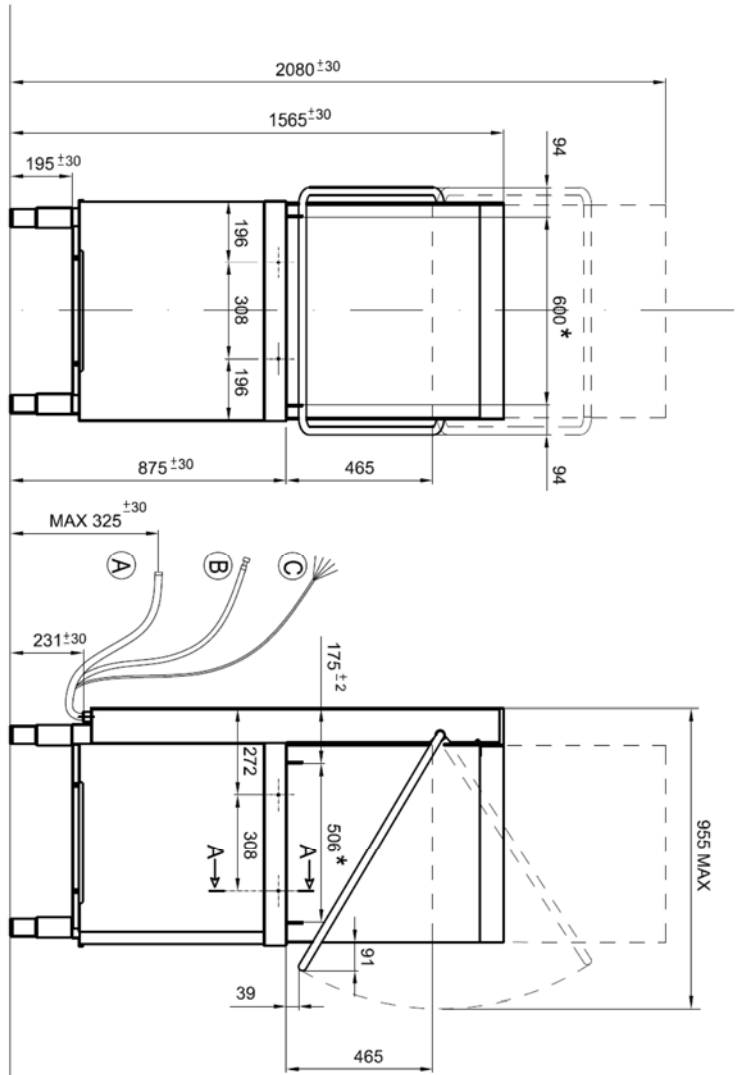

SEZ. A-A

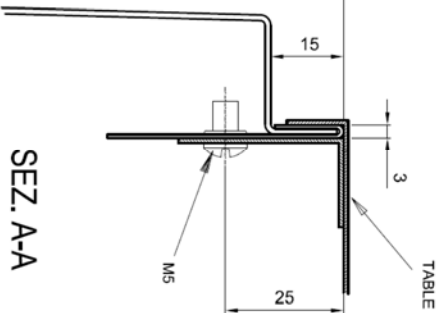


1 X

2 X

4 X

INSTALLAZIONE IN LINEA
 LINEAR INSTALLATION
 INSTALLATION EN LIGNE
 ZEILENINSTALLATION
 MESA EN LINEA

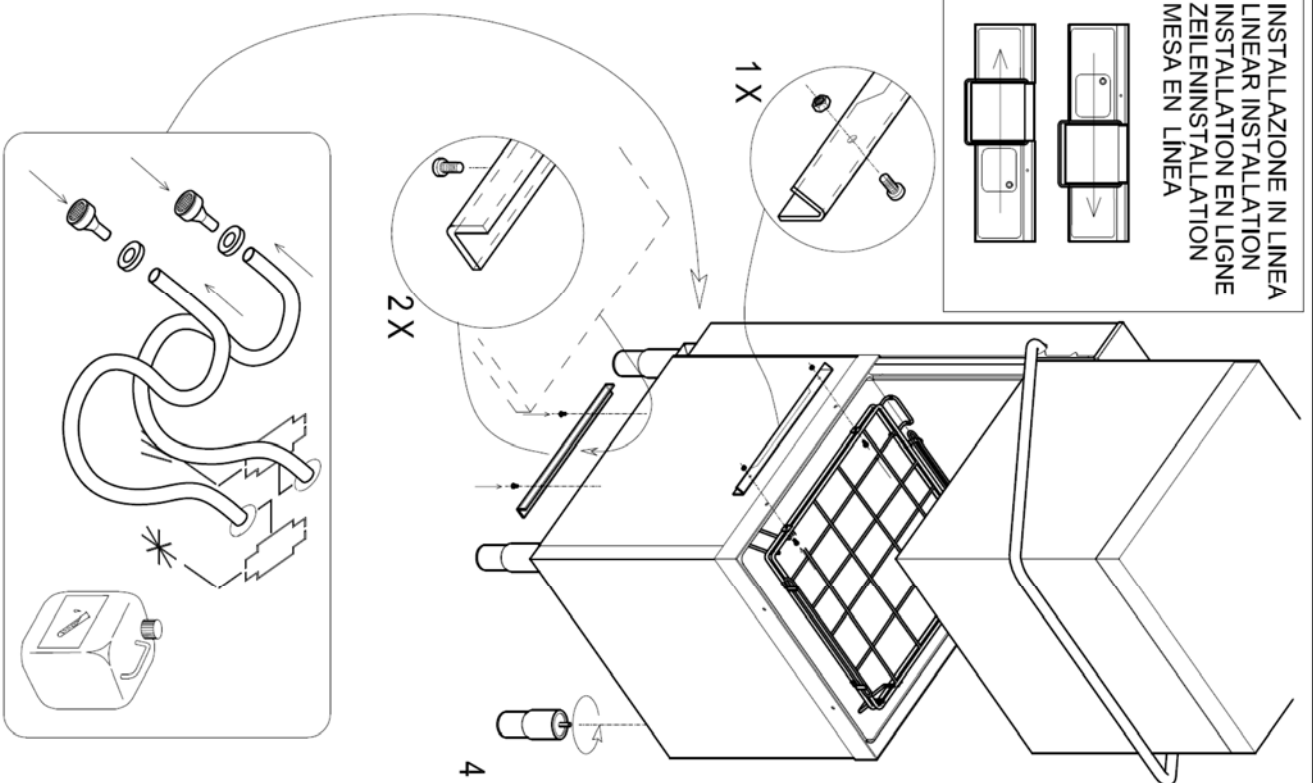

A		Ø 32 mm
B		G 3/4"
C		Power supply

* LUCE UTILE PER CESTELLO
 USEFUL SPACE FOR BASKET
 LUMIERE OUTIL POUR PANIER
 NUTZBARER OFFENUNG FÜR KORBE
 ABERTURA UTIL PARA CESTO

Installation layout

Hood type

70990 02

